

Full Suspension AM E-Bike Frame




Full Suspension All Mountain E-Bike Frame



Model: E04

- Type: 29" full suspension enduro ebike frame
- Brake: Post Mount Disc brake 203mm disc rotor
- Size: 17.5" / 19" / 21"
- Motor: M500(95NM)/M600(120NM) mid drive engine
- Battery: Battery BTF03 / BTF04
- Headtube: Tapered 1 1/8" - 1 1/2" head tube, upper 44mm lower 55mm (Headset standard FSA No.57E)
- Seatpost: $\phi 31.6\text{mm}$ (35mm seat clamp)
- Max Tire: 650B*2.8" and 29er 2.35"
- Weight: 3600 \pm 50g (17.5")
- Rear shock size: 185*55mm (22* $\phi 10\text{mm}$, 54*M10*P1.0)
- Rear travel: 150mm
- Max Chaining: 34T
- Test Standard: ISO4210
- Finish: UD / Color

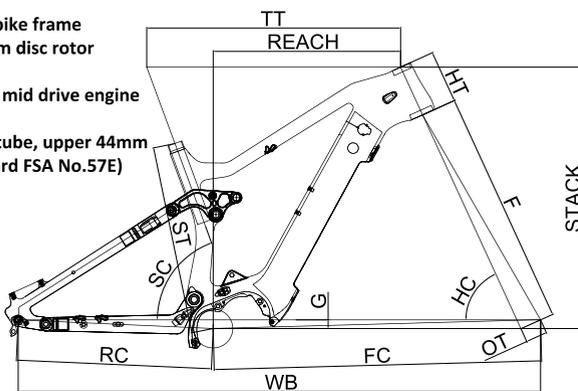


Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
17.5	450	70°	125	65.5°	600	560	20.5	460	51	773.9	1234.3	623	443.1
19	480	70°	135	65.5°	628	560	20.5	460	51	803.5	1264	633	468.1
21	530	70°	135	65.5°	661	560	20.5	461	51	835.4	1296	633.7	499.7

Model: E07

- Type: 29"*2.6" AM Ebike Frame
- Brake: Post Mount Disc brake
- Size: 15" / 17.5" / 19" / 21"
- Motor: SHIMANO DU-EP800 mid drive engine
- Battery: SHIMANO BT-E8036 (630Wh) Darfon E4C0G (720Wh)
- Headtube: Upper 52mm, Lower 66mm; (Headset PT-1864D-078 ZOOM)
- Seatpost: $\phi 31.6\text{mm}$ (37mm seat clamp)
- Max Tire: 29"*2.6" / 27.5"*3.0"
- Weight: 3700 \pm 50g(17.5")
- Rear shock size: 205*65mm (Upper: 54*M10*P1.0, Lower: 30* $\phi 10$)
- Rear travel: 150mm
- Max Chaining: 34T
- Test Standard: ISO4210
- Finish: UD / Color

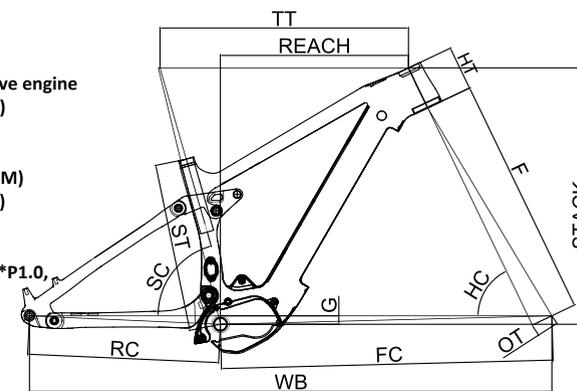

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
15	400	76.5°	105	64.5°	585	572	20	450	51	781	1230.5	609	443
17.5	440	76.5°	115	64.5°	605	572	20	450	51	803	1252.5	619	460
19	480	76.5°	125	64.5°	630	572	20	450	51	829	1278.5	627	483
21	520	76.5°	135	64.5°	655	572	20	450	51	856	1305.7	636	505


Full Suspension Fat E-Bike Frame

Full Suspension AM E-Bike Frame



Model: E18-A

Type: FULL Suspension AM E-bike Frame
 Brake: Post Mount Disc brake
 Size: 15.5"/17.5"/19"
 Motor: Bafang M620
 Rear shock size: 190*51mm(bushing kits spec 22.2*10mm upper and bottom)
 Battery: Bafang BT F15.882C
 SYR MUSTANG Pro 70B / PATHFINDER B (48V17.5Ah/36V24.5Ah)
 Headtube: Upper 44mm lower 56mmFSA-NO.57
 Seatpost: $\phi 31.6$ mm
 Max Tire: 26"*4.8"
 Dropout: 190mm $\phi 12$ mm
 Weight: 4010 ± 50 g(17.5")
 Rear travel: 150mm
 Max Chaining: 44T
 Test Standard: ISO4210
 Finish: UD/Color

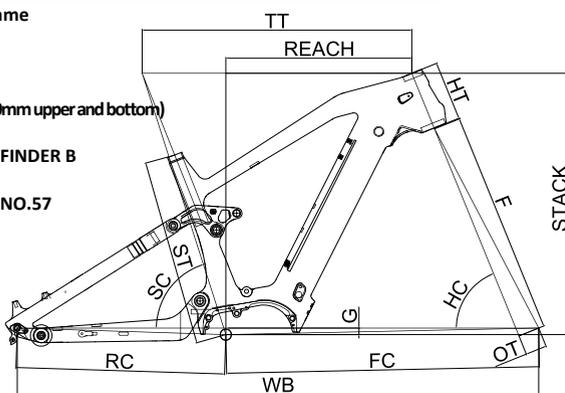


Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
15.5	400	72.4°	133	68°	620.1	540	15.8	500	51	722.9	1222.5	621.6	423
17.5	451	72.4°	143	68°	646.3	540	15.8	500	51	749.8	1249.4	631.7	446
19	482	72.4°	153	68°	672.7	540	15.8	500	51	776.4	1276.1	640.1	469

Model: E18-B

Type: FULL Suspension AM E-bike Frame
 Brake: Post Mount Disc brake
 Size: 15.5"/17.5"/19"
 Motor: Bafang M500/M600
 Rear shock size: 190*51mm(bushing kits spec 22.2*10mm upper and bottom)
 Battery: Bafang BT F15.882C
 SYR MUSTANG Pro 70B / PATHFINDER B (48V17.5Ah/36V24.5Ah)
 Headtube: Upper 44mm lower 56mmFSA-NO.57
 Seatpost: $\phi 31.6$ mm
 Max Tire: 29"*2.6"/27.5"*3.0"
 Dropout: 148mm $\phi 12$ mm
 Weight: 3950 ± 50 g(17.5")
 Rear travel: 150mm
 Max Chaining: 44T
 Test Standard: ISO4210
 Finish: UD/Color

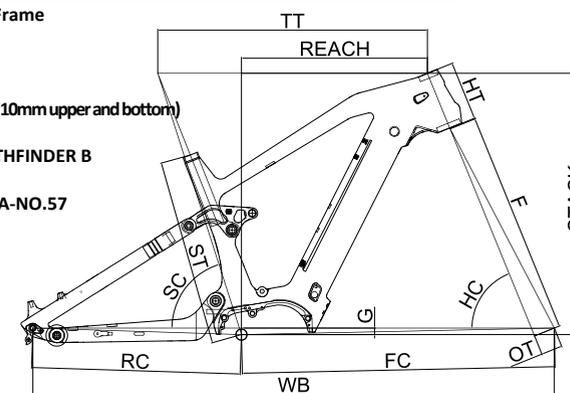

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
15.5	400	72.4°	133	68°	620.1	540	15.8	500	51	722.9	1222.5	621.6	423
17.5	451	72.4°	143	68°	646.3	540	15.8	500	51	749.8	1249.4	631.7	446
19	482	72.4°	153	68°	672.7	540	15.8	500	51	776.4	1276.1	640.1	469

Full Suspension Fat E-Bike Frame




Model: E23-A

Type: Full Suspension Fat E-Bike Frame
 Brake: Post Mount Disc Brake
 Size: 17.5"
 Motor: Bafang M620/M600/M510
 Battery: Bafang BT F38

REENTION KINGKONG
 (48V20Ah/36V25Ah)
 Headtube: Upper 52mm, Lower 56mm
 Dropout: 190mm*12mm (TA)
 Max tire: 26"*4.8"

Weight: 4150±50g(17.5")
 Rear shock size: 190*51mm standard mount rear shock
 (bushing kits spec 22.2*8mm upper and bottom)

Rear travel: 150mm
 Test Standard: ISO4210
 Finish: UD/Color

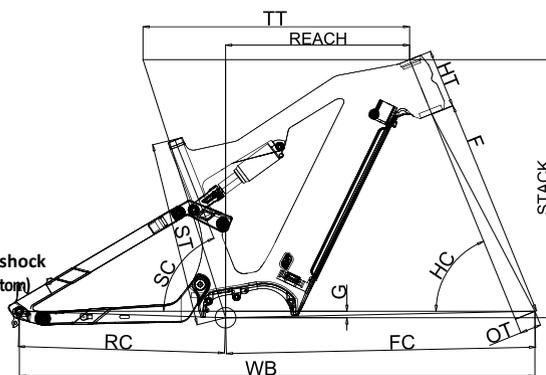

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
17.5	450	68.5°	143	68°	646	540	16	500	51	749.7	1249	631	446

Full Suspension AM E-Bike Frame




Model: E23-B

Type: Full Suspension AM E-Bike Frame
 Brake: Post Mount Disc Brake
 Size: 17.5"
 Motor: Bafang M620/M600/M510
 Battery: Bafang BT F38

REENTION KINGKONG
 (48V20Ah/36V25Ah)
 Headtube: Upper 52mm, Lower 56mm
 Dropout: 148mm*12mm (TA)
 Max tire: 29"*2.6"

Weight: 4100±50g(17.5")
 Rear shock size: 190*51mm standard mount rear shock
 (bushing kits spec 22.2*8mm upper and bottom)

Rear travel: 150mm
 Test Standard: ISO4210
 Finish: UD/Color

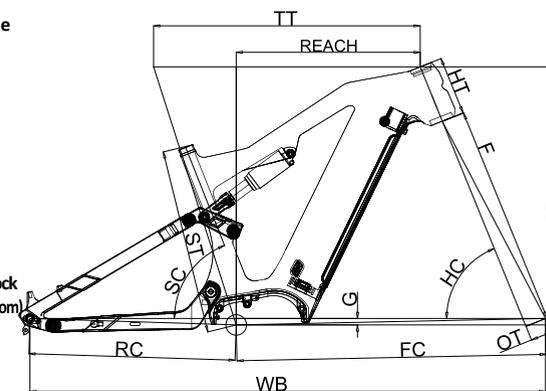

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
17.5	450	68.5°	143	68°	646	540	16	500	51	749.7	1249	631	446


Full Suspension AM E-Bike Frame

Full Suspension AM E-Bike Frame



Model: E25

Type: Full Suspension E-MTB Frame
Brake: Post Mount Disc Brake
Size: 17.5"/19"
Motor: Bafang M510 / M560
Battery: Bafang BT F15.882C
 SYR MUSTANG Pro 70B / PATHFINDER B
 (48V17.5Ah/36V24.5Ah)
Headtube: Upper 52, Lower 52
Dropout: 148*12 (TA)
Max Tire: 29"*2.6" / 27.5"*3.0"
Weight: 3823g±50g (17.5")
Rear Shock Size: 190*55 (22.2*φ8, 22.2*φ8)
Rear Travel: 150mm
Test Standard: ISO4210
Finish: UD/Color

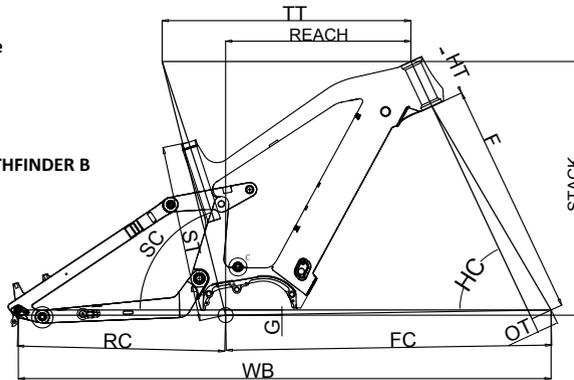


Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
17.5	430	72°	120	65°	600	570	12.5	500	51	785.3	1285	617	447
19.5	480	72°	130	65°	620	570	12.5	500	51	800	1300	629.4	463

Model: E30

Type: 29"*2.6" AM Ebike Frame
Brake: Post Mount Disc brake
Size: 17.5"/ 19"
Motor: SHIMANO DU-EP800 mid drive engine
Battery: SHIMANO BT-E8036 (630Wh)
 Darfon E4C0G (720Wh)
Headtube: Tapered 1-1/2", 1-1/2"
Seatpost: φ30.9mm(35mm seat clamp)
Max Tire: 29"*2.6" / 27.5"*3.0"
Weight: 3950±50g(17.5")
Rear shock size: 190*51mm
 (22.2*φ8mm,22.2*φ8mm)
Rear travel: 150mm
Max Chaining: 34T
Test Standard: ISO4210
Finish: UD / Color

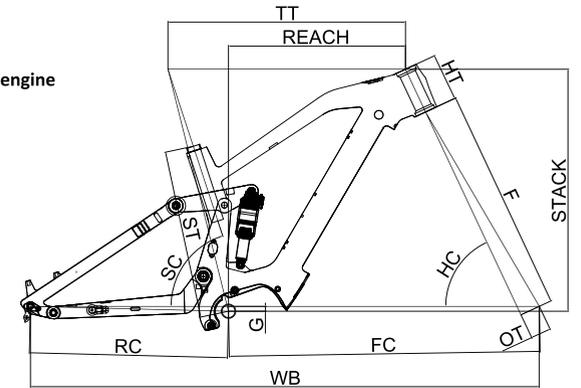

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
17.5	430	72°	120	65°	600	570	12.5	500	51	785.3	1285	617	447
19.5	480	72°	130	65°	620	570	12.5	500	51	800	1300	629.4	463

29"*2.6" Full Suspension Ebike Frame




29"*2.35" AM E-Bike Frame




Model: E40

- Type: 29er Full Suspension Ebike Frame
- Brake: Post Mount Disc Brake
- Size: 17" / 19"
- Motor: Bafang M510
- Rear Shock: 205-57.5mm(Bushing Kits Spec $\phi 22.2 \times 8$ mm)
- Headtube: Upper 52mm, Lower 52mm
- Battery: 36V*20AH, 48V*15ah
- Max Tire: 29"*2.6"
- Weight: 2600g \pm 50g
- Rear Travel: 150mm
- Max Chaining: 38T
- Finish: UD/Color

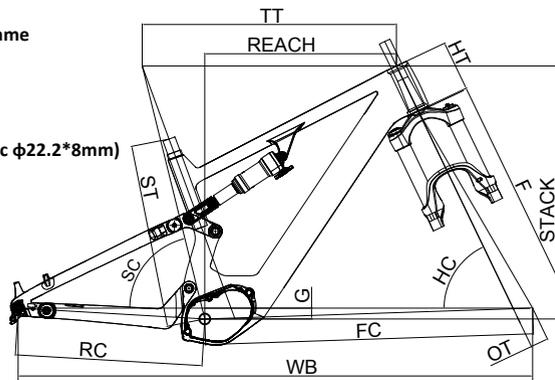

Model: E10

- Type: 29"*2.35" AM Ebike Frame
- Brake: Post Mount Disc brake
- Size: 15.5"/17.5"/19"
- Motor: bafangM500/M600
- Battery: REENTION RHINO7 36V*24.5&48V*17.5
- Headtube: Upper 44mm lower 56mm FSA-NO.57
- Seatpost: $\phi 31.6$ mm
- Max Tire: 29"*2.35"
- Dropout: 148mm $\phi 12$ mm
- Weight: 2650g \pm 50g
- Max Chaining: 40T
- Test Standard: ISO4210
- Finish: UD/Color

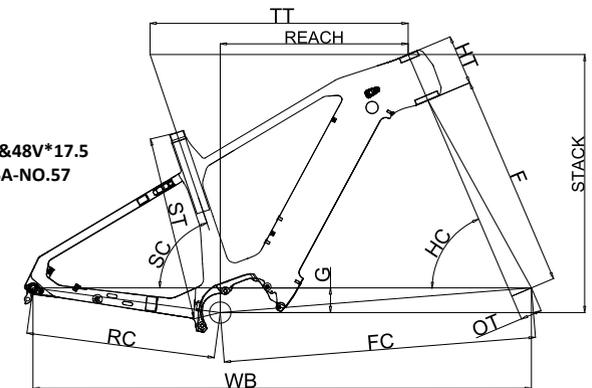

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
425	425	76.2°	125	64.5°	633	567	25	465	44	816.2	1280	635	477

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
17.5	444	71.5°	120	67°	615	511	59	450	51	743.8	1187.3	620	448
19	480	71.5°	130	67°	635	511	59	450	51	765.1	1209.2	630	465
21	530	71.5°	150	67°	655	511	59	450	51	785.8	1229.4	638.3	482.2

700C / 27.5" Electric Gravel Frame




700C*32C City E-Bike Frame



Model: E02 + F04


Type: 700C*45C Electric Gravel Bike
 Brake: Disc Brake (Flat Mount)
 Size: 500mm / 530mm / 560mm / 590mm
 Headtube: Tapered 1-1/8", 1-1/2"
 Dropout(Frame): 142mm*φ12mm (TA)
 Dropout(Fork): 100mm*12mm (TA)
 Weight(Frame): 1200g±50g (530mm)
 Weight(Fork): 450g±20g
 Seatpost: φ27.2mm
 Motor: Fazua Ride 50 Trail
 Max Tire: 700C*45C / 27.5"*1.75"
 Finish: UD / Color

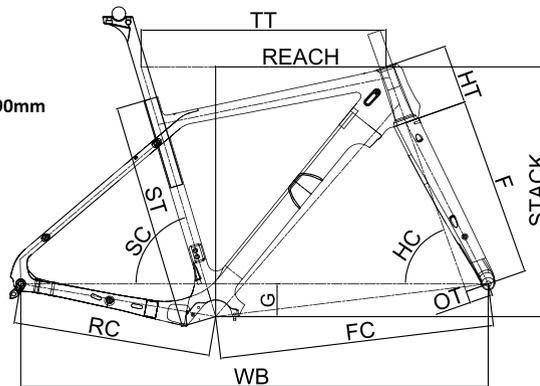

Length: mm/Angle:°													
SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
500	500	73.5°	130	70.5°	535	395	72	432	51	599.8	1021.4	549.9	372.1
530	530	73.3°	150	71.5°	550	395	72	432	51	603.3	1024.9	572.7	377.7
560	560	73°	170	72°	565	395	72	432	51	611.9	1033.6	593.6	384.5
590	590	72.75°	190	72.5°	580	395	72	432	51	618.3	1040.6	612.5	389.8

Model: E08 + F13-KP + P01 + HR03

Type: Rear Motor 700C*32C Road City Bike Frame
 Brake: Flat Mount
 Size: 520mm
 Battery: GECKO (VELOTEC)
 Headtube: Upper 52mm, Lower 52mm
 Seatpost: 31.6mm
 Max Tire: 32C
 Dropout(Frame): 140mm*10mm
 Dropout(Fork): 100mm*9mm
 Weight(Frame): 1650±50g
 Weight(Fork): 450g
 Bottom Bracket: BSA-73mm
 Finish: UD

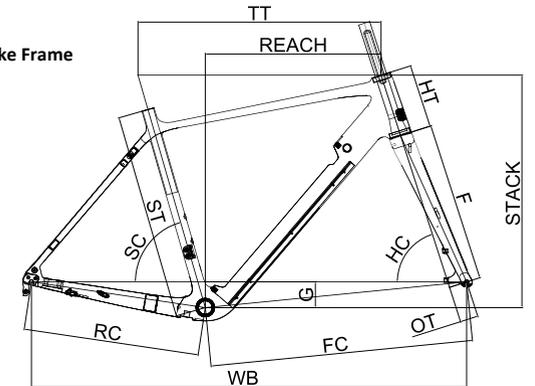


Length: mm/Angle:°													
SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
520	520	74°	160	72°	608.3	402	65	440	45	657.4	1089.5	586.7	440

700C*32C Electric Road Bike Frame



Model: E48 + F10 + P04

Type: 700C*32C Electric Road Bike Frame
 Brake: Flat Disc Brake
 Size: 450/480/510/540/560/580mm
 Rear Hub Motor: 150mm
 Battery Case: REENTION IBE-U
 Headtube: Upper 52mm, Lower 52mm
 Max Tire: 700C*32C
 Weight (Frame): 1200g±50g
 Weight (Fork): 450g±20g
 Finish: UD/Color

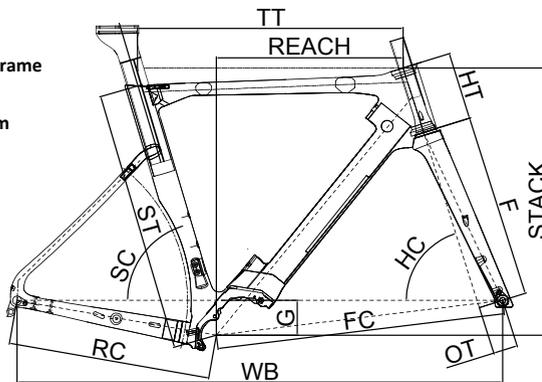


Length: mm/Angle:°													
SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
450	450	75°	100	70°	500	380	72	415	50	580	984	506	364
480	480	75°	120	71°	510	380	72	415	50	583	987	528.5	368
510	510	74.3°	130	71.5°	525	380	72	415	50	586.7	991	537	374
540	540	73.7°	140	72°	545	380	72	415	50	591.4	995.7	552.8	383
560	560	73°	160	72.5°	560	380	72	415	50	605	1001.8	572	389
580	580	72.5°	190	73°	590	380	72	415	50	620	1009.8	615	397

29er MTB Frame



Model: M07

Type: 29"*2.35" MTB Frame
 Brake: Post Mount Disc brake
 Size: 15" / 17" / 19"
 Seatpost: 31.6mm
 Front Derailleur: Bottom Pull Front Derailleur
 Side Swing Front Derailleur
 Weight: 1260g±50g
 Max Chainring: 34T
 Dropout: φ12*148mm boost thru axle
 Test Standard: ISO4210 / EN
 Finish: UD / Color
 Warranty: 2 Years

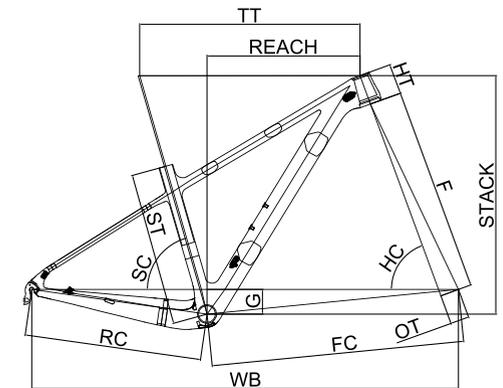

Length: mm/Angle:°													
SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
15	380	74°	75/90	70°	545	506	61	435	46	620.9	1048.6	591	376
17	431	74°	85/90	70°	595	506	61	435	46	670.9	1099	600	423
19	483	74°	95	70°	625	506	61	435	46	701.4	1048.6	610	450

29" Full Suspension Trail MTB Frame




Full Suspension AM MTB Frame



Model: M06

Type: 29" full suspension Trail MTB frame
 Material: High Modulus toho carbon fiber
 Size: 17.5" / 19" / 20.5"
 Rear Travel: 130mm
 Rear Shock: 165*45mm trunnion mount rear shock (bushing kits spec upper 54*φ10, bottom 30*φ8mm)
 Headtube: Tapered 1 1/8" - 1 1/2"
 Weight: 2200g±50g (17.5")
 Seatpost: φ31.6mm(37mm clamp)
 Bottom Bracket: BSA -73mm
 Max Tire Clearance: 29"*2.35" / 27.5"*2.8"
 Max Compatible Chainring: 34T
 Front Derailleur: Single chainring 1x drivetrain system
 Rotor: 180mm
 Dropout: 12*148mm boost thru axle
 Test Standard: ISO4210 / EN
 Finish: UD / Color
 Warranty: 2 years

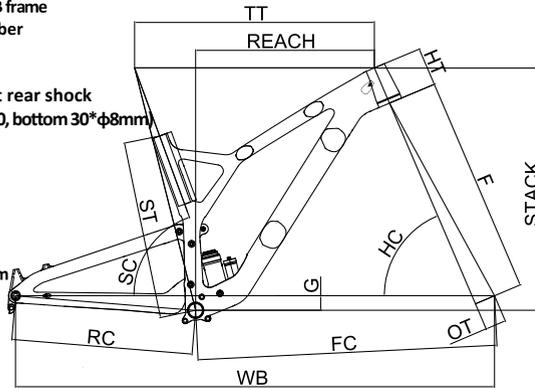


Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
17.5	441	70°	95	67°	590	541	36	444.5	51	736.3	1178.4	601	440
19	480	70°	100	67°	623	541	36	444.5	51	772	1214.3	615	470
20.5	520	70°	125	67°	658	541	36	444.5	51	807.9	1250.1	629	500

Model: M09

Type: 29"*2.6" FULL SUSPENSION AM MTB Frame
 Brake: Post Mount Disc brake
 Size: 15.5" / 17.5" / 19"
 Rear Travel: 160mm
 Rear Shock: 185*55mm(30*185*57 Standard Mount)
 Headtube: Traped 1 1/8"-1 1/2"; (Uppern44mm, Lower 56mm; Headset Standard FSA No. 57E)
 Max Chainring: 32T [12-speed free wheel (10-50T) compatible]
 Seatpost: 31.6mm
 Max Tire: 29"*2.6" / 650B*3.0"
 Weight: 2700g±50g(17.5")
 Bottom Bracket: BSA -73mm
 Dropout: φ12*148mm boost thru axle
 Test Standard: ISO4210 / EN
 Finish: UD / Color
 Warranty: 2 Years

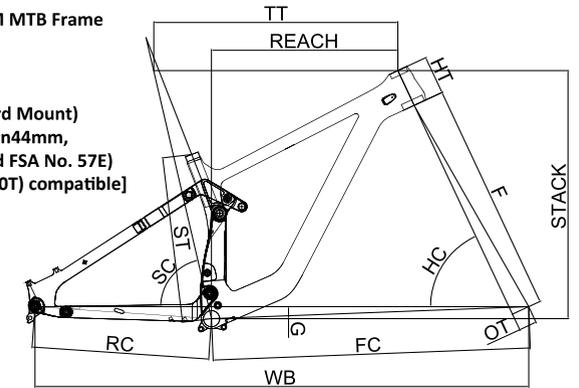

Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
15.5	410	77°	95	65°	600	571	30	435	44	780	1213.5	615	458
17.5	445	77°	100	65°	630	571	30	435	44	810.8	1244.3	620	487
19	485	77°	110	65°	650	571	30	435	44	832.8	1267	628.6	504.9

700C*50C Gravel Bike Frame




700C*45C Gravel Carbon Frame



Model: R16 + R16-FK + P01

Type: 700C*50C Gravel Bike Frame
 Brake: Flat Mount Disc Brake
 Size: 470 / 500 / 530 / 560 / 590
 Headtube: $\phi 52\text{mm}$ (Up and Down)
 Dropout(Frame): 142mm* $\phi 12\text{mm}$
 Dropout(Fork): 100mm* $\phi 12\text{mm}$
 Weight(Frame): 1120g $\pm 50\text{g}$
 Weight(Fork): 340g $\pm 20\text{g}$
 Seatpost: Aero Seatpost
 Bottom Bracket: BB86
 Max Tire: 700C*50C
 Finish: UD/Color

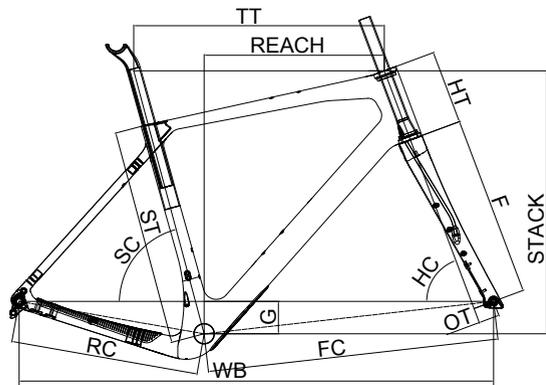


Length: mm/Angle:°

SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
440	440	74.5°	130	69.5°	550	415	75	430	48	632	1051	570	392
470	470	74.5°	150	69.5°	565	415	75	430	48	650	1068	588	402
500	500	74.5°	170	69.5°	580	415	75	430	48	666	1085	607	412
530	530	74.5°	190	69.5°	600	415	75	430	48	687	1107	626	426
560	560	74.5°	210	69.5°	620	415	75	430	48	709	1129	645	441

Model: MD01 + F04-F + P01

Type: 700C*45C Gravel Bike
 Brake: Disc Brake (Flat Mount / Post Mount)
 Size: 500mm / 530mm / 560mm
 Headtube: Tapered 1-1/8", 1-1/2" (Headset: FSA NO 42-ACB)
 Dropout(Frame): 142mm* $\phi 12\text{mm}$ (TA) / 135mm* $\phi 10\text{mm}$ (QR)
 Dropout(Fork): 100mm* $\phi 12\text{mm}$ (TA) / 100mm* $\phi 9\text{mm}$ (QR)
 Weight(Frame): 1050 $\pm 50\text{g}$ (530mm)
 Weight(Fork): 530 $\pm 20\text{g}$
 Seatpost: $\phi 27.2\text{mm}$
 Bottom Bracket: BB86 Press Fit
 Max Tire: 700C*45C
 Finish: UD / Color

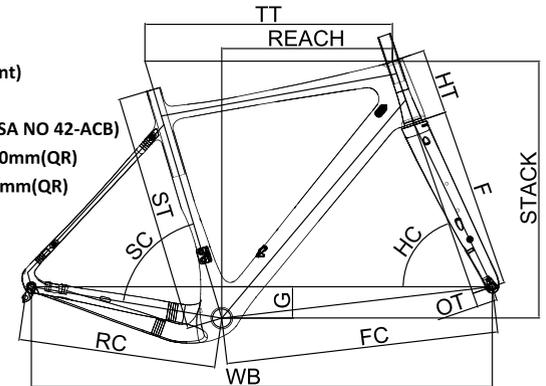

Length: mm/Angle:°


SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
500	500	74°	125	71°	525.5	400	70	425	45	589.6	1004.6	549.6	368
530	530	73.5°	145	71°	545	400	70	425	45	600	1015	570.6	376
560	560	73°	169	71.5°	570.4	400	65	425	45	616.6	1033.2	590	390

700C Full Carbon Road Racing Frame



Model: R01-F + F03 + P01

Type: 700C Road Bike
 Brake: Disc Brake (Flat Mount)
 Size: 470mm / 500mm / 530mm / 560mm / 580mm
 Headtube: Tapered 1-1/8", 1-1/2"
 Dropout(Frame): 142mm*φ12mm(TA)
 Dropout(Fork): 100mm*φ12mm(TA)
 Weight(Frame): 930±50g (470mm)
 Weight(Fork): 380±20g
 Seatpost: φ31.6mm
 Bottom Bracket: BB86 Press Fit
 Max Tire: 700C*25C
 Finish: UD / Color

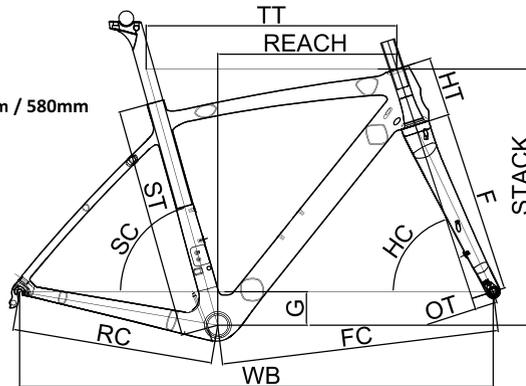

Length: mm/Angle:°


SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
470	470	74.5°	120	72°	505	370	68	405	45	559.1	954.2	520	361
500	500	73.5°	130	72°	535	370	68	410	45	579.4	979.8	530	378
530	530	73°	155	72°	550	370	68	405	45	589.7	985	553	381
560	560	72.5°	170	73°	570	370	68	408	45	594.5	993	571	390
580	580	72.5°	190	73°	590	370	68	410	45	614.4	1015	590	404

700C Aero Disc Road Racing Frame



Model: R02-F + F03 + P02

Type: 700C*28C Aero Road Bike
 Brake: Disc Brake (Flat Mount)
 Size: 450mm / 480mm / 510mm / 540mm / 570mm
 Headtube: Tapered 1-1/8", Straight 1-1/2"
 O.L.D(Frame): 142mm*φ12mm (TA)
 O.L.D(Fork): 100mm*φ12mm (TA)
 Weight(Frame): 1080±50g(540mm)
 Weight(Fork): 380±20g
 Seatpost: Aero post P02
 Bottom Bracket: BB86 Press Fit
 Max Tire: 700C*28C
 Finish: UD / Color

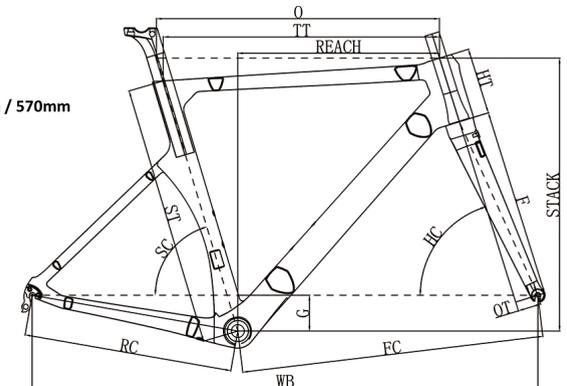

Length: mm/Angle:°

SIZE	ST	O	SC	TT	HT	HC	F	OT	WB	FC	RC	G	REACH	STACK
XS	450	500	74.0°	478.0	110	71.0°	370	45	952.5	536	405	68	354	513
S	480	525	73.5°	505.3	120	72.5°	370	45	956.0	561	405	68	369	524
M	510	550	73.5°	537.6	130	72.5°	370	45	981.0	590	405	68	393	531
L	540	570	72.5°	558.3	150	73.5°	370	45	985.0	590	405	68	396	552
XL	570	590	72.0°	580.1	170	73.5°	370	45	1000.0	604	408	72	404	571

700C Aero Disc Road Racing Frame




700C Aero Disc Road Racing Frame



Model: R04-F+P04+F06-F+HR03


Brake: Disc Brake (Flat Mount)
 Size: 480mm/510mm/540mm/560mm/590mm
 Headtube: Straight 1 1/2" (Headset: FSA No.42ACB)
 Groupset: Recommended install electronic shifting groupset
 Dropout(Frame): 142mm*φ12mm (TA)
 Dropout(Fork): 100mm*φ12mm (TA)
 Weight(Frame): 1150±50g (540mm)
 Seatpost: Aero post P04
 Bottom Bracket: BB86 Press Fit
 Max Tire: 700C*28C
 Finish: UD / Color

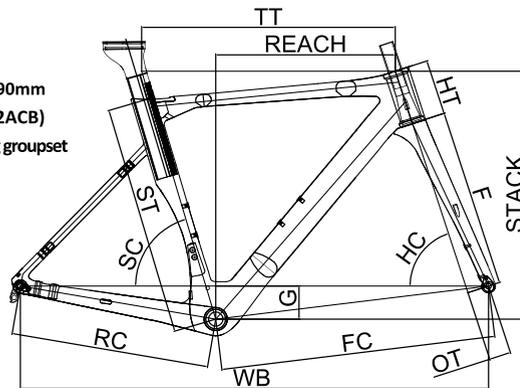

Length: mm/Angle:°													
SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
480	480	73.5°	115	72°	524.5	371	69	410	45	568.5	968.5	517	371
510	510	73.5°	130	72°	539.6	371	69	410	45	583.8	983.9	531.5	382
540	540	73.5°	135	72°	550	371	69	410	45	594.5	994.6	536	391
560	560	73.5°	150	72°	560	371	69	410	45	604.7	1005	550.6	397
590	590	73.5°	170	72°	575	371	69	410	45	620.3	1020.6	574.2	405

Model: R04-C+P04+F06-C+HR03

Brake: Caliper Brake (Direct mount)
 Size: 480mm/510mm/540mm/560mm/590mm
 Headtube: Straight 1 1/2" (Headset: FSA No.42ACB)
 Groupset: Recommended install electronic shifting groupset
 Dropout(Frame): 142mm*φ12mm (TA)
 Dropout(Fork): 100mm*φ9mm (TA)
 Weight(Frame): 1080±50g (540mm)
 Seatpost: Aero post P04
 Bottom Bracket: BB86 Press Fit
 Max Tire: 700C*28C
 Finish: UD / Color

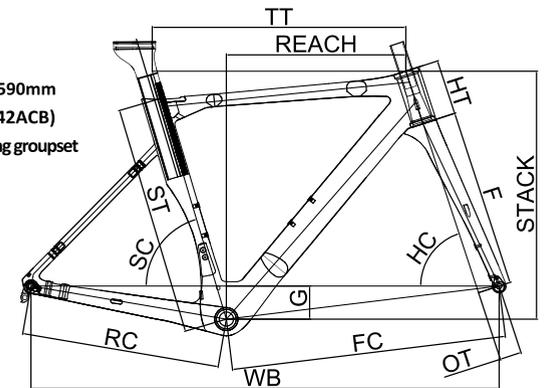


Length: mm/Angle:°													
SIZE	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH
480	480	73.5°	115	72°	524.5	371	69	410	45	568.5	968.5	517	371
510	510	73.5°	130	72°	539.6	371	69	410	45	583.8	983.9	531.5	382
540	540	73.5°	135	72°	550	371	69	410	45	594.5	994.6	536	391
560	560	73.5°	150	72°	560	371	69	410	45	604.7	1005	550.6	397
590	590	73.5°	170	72°	575	371	69	410	45	620.3	1020.6	574.2	405

700C Road Bike Frame



Model: R10-FM+R10-FK+P01

- Type: 700C Road Bike
- Brake: Disc brake(Flat Mount)
- Size: 490/520/540/560/590
- Headtube: Straight 1 1/2"
- Dropout(Frame): 142mm*φ12mm (TA)
- Dropout(Fork): 100mm*φ12mm (TA)
- Weight(Frame): 1150g±50g
- Seatpost: 27.2mm
- Bottom Bracket: BB86 Press Fit
- Max Tire: 700C*32C
- Test Standard: ISO4210
- Finish: UD/Color

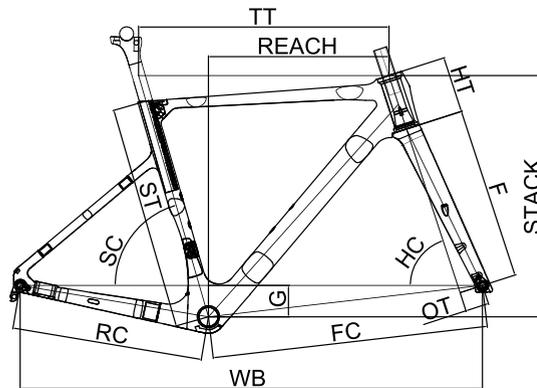

SIZE	Length: mm/Angle:°													
	ST	SC	HT	HC	TT	F	G	RC	OT	FC	WB	STACK	REACH	
490	450	74°	105	72°	520	368	67	405	50	572.9	969	501	376	
520	480	74°	120	72°	531	368	67	405	50	585.4	980.9	516	383	
540	510	74°	140	73°	547	368	67	405	50	592.8	988.4	538	393	
560	540	73°	160	73°	568	368	67	405	50	603.5	999.2	557	398	
590	570	73°	170	74°	587	368	67	405	50	617.6	1014	580	415	

Aero Road Handlebar HR02



Model: HR02 Material: Carbon Fiber
Width: 400 / 420 / 440mm
Reach: 90mm Drop: 127.5mm
Finish: UD / Color

Integrated Road Handlebar HR03



Model: HR03
Material: Carbon Fiber
Width: 400 / 420 / 440mm
Stem: 90/100/110/120mm
Reach: 82mm Drop: 125mm
Stem angle: -7 degree Weight: 365±10g
Finish: UD / Color

Integrated Gravel Handlebar HR04



Model: HR04
Material: Carbon Fiber
Width: 400 / 420 / 440mm Drop: 125mm
Stem: 90/100/110/120mm Reach: 82mm
Stem angle: -7 degree Finish: UD / Color

Integrated Road Handlebar HR05



Model: HR05 Material: Carbon Fiber
Width: 400 / 420 / 440mm
Reach: 82mm Drop: 125mm
Stem: 80/90/100/110/120mm
Stem angle: -8 Finish: UD / Color

31.8mm MTB Handlebar HM01



Model: HM01
Dia: 31.8mm
Back Sweep: 9°
Width: 640/660/680/700mm
Finish: UD / Color

Type: MTB
Rise: 0
Up Sweep: 5°
Weight: 160g±5g (640mm)

31.8mm AM MTB Handlebar HM02



Model: HM02
Dia: 31.8mm
Back Sweep: 9°
Width: 735/760/790mm
Finish: UD / Color

Type: AM - MTB
Rise: 15
Up Sweep: 5°
Weight: 220g±5g (760mm)

31.8mm DH MTB Handlebar HM03



Model: HM03
Dia: 31.8mm
Back Sweep: 9°
Width: 787/817mm
Finish: UD / Color

Type: DH - MTB
Rise: 25
Up Sweep: 5°
Weight: 260g±5g (787mm)

35mm DH MTB Handlebar HM04



Model: HM04
Dia: 35mm
Back Sweep: 9°
Width: 800/820mm
Finish: UD / Color

Type: AM - MTB
Rise: 15
Up Sweep: 5°
Weight: 225g±5g (800mm)

35mm AM MTB Handlebar HM05



Model: HM05
Dia: 35mm
Back Sweep: 9°
Width: 800/820mm
Finish: UD / Color

Type: AM - MTB
Rise: 25
Up Sweep: 5°
Weight: 225g±5g (800mm)

35mm AM MTB Handlebar HM07



Type: HM07
Width: 820mm
Rise: 50
Up Sweep: 5°
Stem angle: -8

Dia: 35mm
Back Sweep: 9°
Weight: 260g±5g
Finish: UD / Color

35mm DH MTB Handlebar HM06



Model: HM06
Dia: 35mm
Back Sweep: 9°
Width: 810/830mm
Finish: UD / Color

Type: DH - MTB
Rise: 30
Up Sweep: 5°
Weight: 250g±5g (810mm)

Model: P01



Material: Full Carbon
Diameter: ϕ 31.6mm / 27.2mm
Offset: 11.0mm / 13.0mm Length: 350mm / 400mm
Weight: 120g±10g Finish: UD / Color

Model: ST01



Fork Clamp Dia: 28.6mm
Bar Clamp Dia: 31.8mm
Weight: 135g±5g (110mm)
Angle: 6°
Length: 80mm / 90mm / 100mm / 110mm
Finish: UD / Color

▶ 700C*25C ROAD FORK F01-D



Model	F01-D
Brake	Disc Brake (Post)
O.L.D	100*φ10mm(TA) / 100*φ9mm (QR)
Steer	39.8mm
Blade Length	370mm
Crown Race	φ58mm
Offset	45mm
Material	Carbon
Tire	700C*25C
Weight	422±20g
Finish	UD / Color

▶ 700C*25C ROAD FORK F01-V



Model	F01-V
Brake	V Brake
O.L.D	100*φ9mm (QR)
Steer	39.8mm
Blade Length	370mm
Crown Race	φ58mm
Offset	45mm
Material	Carbon
Tire	700C*25C
Weight	380±20g
Finish	UD / Color

▶ 700C*25C ROAD FORK F02



Model	F02
Brake	Caliper Brake
O.L.D	100*φ9mm (QR)
Steer	39.8mm
Blade Length	370mm
Crown Race	φ58mm
Offset	45mm
Material	Carbon
Tire	700C*25C
Weight	380±20g
Finish	UD / Color

▶ 700C*28C ROAD FORK F03



Model	F03
Brake	Disc Brake (Flat)
O.L.D	100*φ12mm (TA)
Steer	39.8mm
Blade Length	370mm
Crown Race	φ58mm
Offset	45mm
Material	Carbon
Tire	700C*28C
Weight	380±20g
Finish	UD / Color

▶ 700C*45C GRAVEL FORK F04



Model	F04
Brake	Disc Brake (Flat)
O.L.D	100*φ12mm (TA)
Steer	39.8mm
Blade Length	375mm
Crown Race	φ58mm
Offset	45mm
Material	Carbon
Tire	700C*45C(Max 50C)
Weight	450±20g
Finish	UD / Color



► 700C*38C ROAD FORK F13

Model	F13
Brake	Disc Brake (Flat)
O.L.D	100* ϕ 12mm (TA) / 100* ϕ 9mm (QR)
Steer	39.8mm
Blade Length	375mm
Crown Race	ϕ 58mm
Offset	45mm
Material	Carbon
Tire	700C*38C (Max 45C)
Weight	450 \pm 20g
Finish	UD / Color



► 700C*65C ROAD FORK F16

Model	F16-FM
Brake	Disc Brake (Flat)
O.L.D	100* ϕ 12mm (TA)
Steer	39.8mm
Blade Length	385mm
Crown Race	ϕ 56mm
Offset	46mm/52mm
Material	Carbon
Tire	700C*65C
Weight	560 \pm 25g
Finish	UD / Color



► 700C*45C ROAD FORK F18

Model	F18-FM
Brake	Disc Brake (Flat)
O.L.D	100* ϕ 12mm (TA)
Steer	39.8mm
Blade Length	376mm
Crown Race	ϕ 62mm
Offset	50mm
Material	Carbon
Tire	700C*45C
Weight	515 \pm 20g
Finish	UD / Color



► 700C*45C ROAD FORK F20

Model	F20
Brake	Disc Brake
O.L.D	100* ϕ 15mm (TA)
Steer	39.8mm
Blade Length	384mm
Crown Race	ϕ 62mm
Offset	44mm
Material	Carbon
Tire	700C*45C
Weight	580 \pm 20g
Finish	UD / Color



► 700C*50C ROAD FORK E26-FK

Model	E26-FK-KF
Brake	Disc Brake (Flat)
O.L.D	100* ϕ 9mm (QR)
Steer	39.8mm
Blade Length	382mm
Crown Race	ϕ 64mm
Offset	42mm
Material	Carbon
Tire	700C*50C
Weight	500 \pm 20g
Finish	UD / Color



► 27.5" MTB FORK FM01

Model	FM01
Brake	Disc Brake
O.L.D	100* ϕ 10mm (QR)
Steer	30mm
Blade Length	410mm
Crown Race	ϕ 58mm
Offset	43mm
Material	Carbon
Tire	27.5"*2.1"
Weight	527 \pm 20g
Finish	UD / Color



► 27.5" MTB FORK FM02

Model	FM02
Brake	Disc Brake
O.L.D	100* ϕ 10mm (QR)
Steer	39.8mm
Blade Length	410mm
Crown Race	ϕ 58mm
Offset	43mm
Material	Carbon
Tire	27.5"*2.1"
Weight	527 \pm 20g
Finish	UD / Color



► 29"MTB FORK FM04

Model	FM04
Brake	Disc Brake
O.L.D	110* ϕ 15mm (TA)
Steer	39.8mm
Blade Length	422mm
Crown Race	ϕ 58mm
Offset	51mm
Material	Carbon
Tire	29"*2.6"
Weight	630 \pm 20g
Finish	UD / Color



► 26"MTB FORK FM06

Model	FM06
Brake	Disc Brake
O.L.D	150* ϕ 15mm (TA)
Steer	39.8mm
Blade Length	421mm
Crown Race	ϕ 57mm
Offset	51mm
Material	Carbon
Tire	26"*4.8"/27.5"*4.5"/29"*2.8"
Weight	650 \pm 20g
Finish	UD / Color